

Wave dispersion analysis of rotating heterogeneous nanobeams in thermal environment

Farzad Ebrahimi* and Parisa Haghi

*Department of Mechanical Engineering, Faculty of Engineering,
Imam Khomeini International University, Qazvin, Iran*

(Received November 19, 2016, Revised May 26, 2017, Accepted September 8, 2017)

Abstract. In the present article, wave dispersion behavior of a temperature-dependent functionally graded (FG) nanobeam undergoing rotation subjected to thermal loading is investigated according to nonlocal strain gradient theory, in which the stress numerates for both nonlocal stress field and the strain gradient stress field. The small size effects are taken into account by using the nonlocal strain gradient theory which contains two scale parameters. Mori-Tanaka distribution model is considered to express the gradually variation of material properties across the thickness. The governing equations are derived as a function of axial force due to centrifugal stiffening and displacements by applying Hamilton's principle according to Euler-Bernoulli beam theory. By applying an analytical solution, the dispersion relations of rotating FG nanobeam are obtained by solving an eigenvalue problem. Obviously, numerical results indicate that various parameters such as angular velocity, gradient index, temperature change, wave number and nonlocality parameter have significant influences on the wave characteristics of rotating FG nanobeams. Hence, the results of this research can provide useful information for the next generation studies and accurate deigns of nanomachines including nanoscale molecular bearings and nanogears, etc.

Keywords: wave propagation; rotating nanobeam; FGMs; nonlocal strain gradient theory

1. Introduction

In the realm of nanoscale, the physical and mechanical characteristics of small scale structures provide obvious size effects that makes them to display superior mechanical and thermal attributes. Therefore, in order to investigate the mechanical behavior of nanoscale structures in which the interatomic bonds possess crucial role on their organization, the classical continuum theory which disregards such a significant fact is not appropriate. Thus, this issue has been examined in the context of nonlocal continuum theories such as nonlocal elasticity theory of Eringen, Eringen (1972, 1983). According to this theory, strain/stress state at any reference point is a function of corresponding states of other points of the continuum body. Hence, this theory could take into consideration the effects of small scales. Lots of studies have been performed to investigate the size-dependent response of structural systems based on Eringen's nonlocal elasticity theory (Ebrahimi and Salari 2015a-d, f, Ebrahimi *et al.* 2015a, b, 2016a, Ebrahimi and Nasirzadeh 2015, Ebrahimi and Barati 2016h, s, w, Ebrahimi and Hosseini 2016a-c). Narendar and Gopalakrishnan

*Corresponding author, Ph.D., E-mail: febrahimi@eng.ikiu.ac.ir

(2009) investigated small scale influences on wave propagation of multi-walled carbon nanotubes. Yang *et al.* (2011) investigated wave propagation of double-walled carbon nanotubes on the basis of size-dependent Timoshenko beam model. Wave propagation analysis of single-walled carbon nanotubes exposed to an axial magnetic field in the framework of nonlocal Euler–Bernoulli beam model studied by Narendar *et al.* (2012). Aydogdu (2014) performed longitudinal wave dispersion of carbon nanotubes. Also, Filiz and Aydogdu (2015) explored wave propagation analysis of functionally graded nanotubes conveying fluid embedded in elastic medium. Constitutive boundary conditions and paradoxes in nonlocal elastic nanobeams investigated by Giovanni Romano, Raffaele Barretta, Marina Diaco, Francesco Marotti de Sciarra (2016). A review on nonlocal elastic models for bending, buckling, vibrations, and wave propagation of nanoscale beams explored by Eltaher *et al.* (2016).

By employing the nonlocal elasticity theory of Eringen, the stiffness enhancement observed in experimental works and strain gradient elasticity (Lim and Yang 2010) cannot be forecasted well. Nonlocal strain gradient theory (Yang *et al.* 2002) accounts the stress for both nonlocal elastic stress field and the strain gradient stress field. It must be mentioned that the nonlocal strain gradient theory captures the true effect of the two length scale parameters on the physical and mechanical behavior of small scale structures. Wang (2010) researched wave propagation analysis of fluid-conveying single-walled carbon nanotubes applying strain gradient theory. Li *et al.* (2016) investigated vibration analysis of nonlocal strain gradient FG nanobeams. Also, Şimşek (2016) examined nonlinear vibration behavior of FG nanobeams employing nonlocal strain gradient theory and a novel Hamiltonian approach. In these works, both stiffness-softening and stiffness-hardening effects on vibration behavior of FG nanobeams are reported.

Nano-machines are devices with the moving parts and in nanometer realm. Rotating nanostructures such as nanoscale molecular bearings, nano-gears, nano-turbines and multiple gear systems have gained great attention in research community (Srivastava 1997, Zhang *et al.* 2004). Thus, vibration and wave propagation analysis of such structures are very important for their accurate design. Narendar and Gopalakrishnan (2011b) reported the wave dispersion behavior of a rotating nanotube using the nonlocal elasticity theory. They mentioned that wave characteristics of rotating nanotube is significantly affected by the angular velocity. Aranda-Ruiz *et al.* (2012) investigated free vibration of rotating non uniform nano cantilevers according to the Eringen nonlocal elasticity theory.

Functionally graded materials (FGMs) are composed from a mixture of metal and ceramic and have a continuous material variation from one surface to another which are designed to reach the desirable and practical characteristics. In view of these advantages, a number of investigations, dealing with static, buckling, dynamic characteristics of functionally graded (FG) structures, had been published in the scientific literature (Ebrahimi 2013, Ebrahimi *et al.* 2016b, Ebrahimi and Zia 2015, Ebrahimi and Mokhtari 2015). Recently, many paper have been published concerning with the analysis of FG nanostructures. Among them, Eltaher *et al.* (2012) explored free vibration behavior of nonlocal FG nanobeams using finite element method. Most recently Ebrahimi and Barati (2016a, d, f, g, i, j, n, p, q, r, t, 2017c, l) and Ebrahimi *et al.* (2017) explored thermal and hygro-thermal effects on nonlocal behavior of FG nanobeams and nanoplates. Thermal loading influences on stability and vibrational behavior of nanoscale FGM beams is performed by Ebrahimi and Salari (2015a, b). Ebrahimi and Barati (2016b) employed nonlocal third order beam theory to vibration analysis of nanoscale FG beams. Ahouel *et al.* (2016) investigated size-dependent mechanical behavior of functionally graded trigonometric shear deformable nanobeams including neutral surface position concept. Vibration and buckling analysis of smart

piezoelectrically actuated FG nanobeams subjected to magneto-electrical field is explored by Ebrahimi and Barati (2016m, o, u). In the case of rotating nanobeams, Ebrahimi and Shafiei (2016) examined the application of Eringen’s nonlocal elasticity theory for vibration analysis of rotating FG nanobeams.

It can be seen that, most of the researches are devoted to buckling, static and vibration of FG nanobeams and just a few researchers are working in the field of wave propagation of FG small scale beams. Flexural wave propagation in size-dependent functionally graded beams based on nonlocal strain gradient theory is performed by Li *et al.* (2015). In another work, Ebrahimi and Barati (2016p) explored flexural wave propagation analysis of embedded S-FGM nanobeams under longitudinal magnetic field. Narendar (2016) investigated Wave dispersion in functionally graded magneto-electro-elastic nonlocal rod. According to the literature, wave propagation analysis of temperature-dependent rotating FG nanobeams in thermal environment based on nonlocal strain gradient theory is a novel topic that has not been worked until now.

In the present research, wave propagation characteristics of a rotating functionally graded (FG) nanobeam undergoing rotation is studied based on nonlocal strain gradient theory. Material properties of nanobeam are assumed to change gradually across the thickness of nanobeam according to Mori-Tanaka distribution model. The governing partial differential equations are derived for the rotating FG nanobeam by applying the Hamilton’s principle in the framework of Euler-Bernoulli beam model. An analytical solution is applied to obtain wave frequencies, phase velocities and escape frequencies. It is observed that wave dispersion characteristics of rotating FG nanobeams are extremely influenced by angular velocity, wave number, nonlocal parameter, length scale parameter, temperature change and material graduation.

2. Theory and formulation

2.1 Mori-Tanaka FGM nanobeam model

Material properties of an FG nanobeam with the length L , width b and the thickness h are assumed to vary according to Mori-Tanaka model about the spatial coordinate. Mori-Tanaka homogenization technique represents the local effective material properties of the FG nanobeam including effective local bulk modules K_e and shear modules μ_e in the form

$$\frac{K_e - K_m}{K_c - K_m} = \frac{V_c}{1 + V_m(K_c - K_m) / (K_m + 4\mu_m / 3)} \tag{1}$$

$$\frac{\mu_e - \mu_m}{\mu_c - \mu_m} = \frac{V_c}{1 + \frac{V_m(\mu_c - \mu_m)}{[(\mu_m + \mu_m(9K_m + 8\mu_m)) / (6(K_m + 2\mu_m))]} } \tag{2}$$

where, subscripts m and c denote metal and ceramic, respectively and their volume fractions are related to each other in the following form

$$V_c + V_m = 1 \tag{3}$$

In which

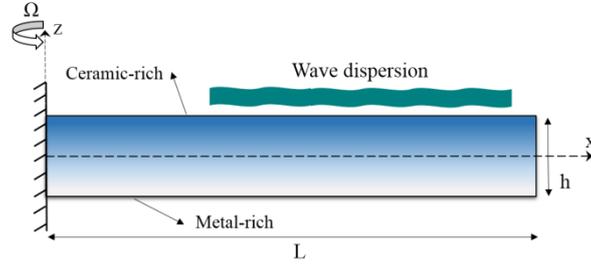


Fig. 1 Configuration of rotating FG nanobeam

$$V_c = \left(\frac{z}{h} + \frac{1}{2}\right)^p, \quad V_m = 1 - \left(\frac{z}{h} + \frac{1}{2}\right)^p \quad (4)$$

here p represents the gradient index which explains gradual variation of material properties through the thickness of the nanobeam. Finally, the effective Young's modulus (E), poisson ratio (ν) and mass density (ρ) can be represent by

$$E(z) = \frac{9K_e\mu_e}{3K_e + \mu_e} \quad (5)$$

$$\nu(z) = \frac{3K_e - 2\mu_e}{6K_e + 2\mu_e} \quad (6)$$

$$\rho(z) = \rho_c V_c + \rho_m V_m \quad (7)$$

and thermal expansion coefficient (α) and thermal conductivity (κ) may be expressed by

$$\frac{\alpha_e - \alpha_m}{\alpha_c - \alpha_m} = \frac{\frac{1}{K_e} - \frac{1}{K_m}}{\frac{1}{K_c} - \frac{1}{K_m}} \quad (8)$$

$$\frac{\kappa_e - \kappa_m}{\kappa_c - \kappa_m} = \frac{V_c}{1 + V_m \frac{(\kappa_c - \kappa_m)}{3\kappa_m}} \quad (9)$$

Also, temperature-dependent coefficients of material phases can be expressed defined by the following relations

$$P = P_0(P_{-1} T^{-1} + 1 + P_1 T + P_2 T^2 + P_3 T^3) \quad (10)$$

where, P_{-1} , P_0 , P_1 , P_2 and P_3 are the temperature-dependent constants which are tabulated in Table 1. The top and bottom surfaces of FG nanobeam are fully ceramic (Si_3N_4) and fully metal

(SUS304), respectively.

In this study, the temperature varies nonlinearly through the thickness. Temperature distribution function can be obtained by dissolve the steady-state heat conduction equation with the boundary conditions on bottom and top surface of the nanobeam across the thickness

$$-\frac{d}{dz}\left(\kappa(z, T) \frac{dT}{dz}\right) = 0 \tag{11}$$

Considering the boundary conditions as follows

$$T\left(\frac{h}{2}\right) = T_c, \quad T\left(-\frac{h}{2}\right) = T_m \tag{12}$$

By solving the above equations, we have

$$T = T_m + (T_c - T_m) \frac{\int_{-\frac{h}{2}}^z \frac{1}{\kappa(z, T)} dz}{\int_{-\frac{h}{2}}^{\frac{h}{2}} \frac{1}{\kappa(z, T)} dz} \tag{13}$$

where, $\Delta T = T_c - T_m$ in the temperature distribution.

2.2 Kinematic relations

In the framework of Euler-Bernoulli beam theory, the displacement field of nonlocal functionally graded nanobeam at any point given as

$$u_x(x, z) = u(x) - z \frac{\partial w}{\partial x} \tag{14}$$

$$u_z(x, z) = w(x) \tag{15}$$

where, u and w defines the components correspond to the longitudinal and bending displacement of a point on the beam's mid-surface, respectively. By considering some small deformations, non-zero strains of present beam model can be expressed as

$$\varepsilon_{xx} = \frac{\partial u}{\partial x} - z \frac{\partial^2 w}{\partial x^2} \tag{16}$$

Also, Hamilton's principle states as

$$\int_0^t \delta(U + V - K) dt = 0 \tag{17}$$

here U is strain energy, V is work done by external forces and K is kinetic energy. The virtual strain energy can be written as

$$\delta U = \int_V \sigma_{ij} \delta \varepsilon_{ij} dV = \int_V (\sigma_{xx} \delta \varepsilon_{xx}) dV \quad (18)$$

Substituting Eq. (16) into Eq (18) yields

$$\delta U = \int_0^L (N \frac{d\delta u}{dx} - M \frac{d^2\delta w}{dx^2}) dx \quad (19)$$

In which the new variables that used in above equation expressed as follows

$$N = \int_A \sigma_{xx} dA, \quad M = \int_A z \sigma_{xx} dA \quad (20)$$

The first variation of the work done by external forces can be written in the following form

$$\delta V = \int_0^L ((N^T + N^R) (\frac{d(w_b)}{dx} \frac{d\delta(w_b)}{dx})) dx \quad (21)$$

where, N^R and N^T are applied force due to rotation and temperature respectively, which are defined by the following relations

$$N^R = b \int_x^L \int_{-h/2}^{h/2} (\rho(z) A \Omega^2 x) dx dz \quad (22)$$

$$N^T = \int_{-h/2}^{h/2} E(z, T) \alpha(z, T) (T - T_0) dz \quad (23)$$

where, Ω and T_0 denote the angular velocity and reference temperature, respectively. In this study, we suppose a uniform rotating nanobeam and maximum axial force is considered (Narendar and Gopalakrishnan 2011)

$$N_{\max}^R = b \int_0^L \int_{-h/2}^{h/2} (\rho(z) A \Omega^2 x) dx dz \quad (24)$$

the variation of kinetic energy can be defined as

$$\begin{aligned} \delta K = & \int_0^L (I_0 [\frac{du}{dt} \frac{d\delta u}{dt} + (\frac{dw}{dt}) (\frac{d\delta w}{dt})] \\ & - I_1 (\frac{du}{dt} \frac{d^2\delta w}{dx dt} + \frac{d^2w}{dx dt} \frac{d\delta u}{dt}) + I_2 (\frac{d^2w}{dx dt} \frac{d^2\delta w}{dx dt})) dx \end{aligned} \quad (25)$$

where

$$(I_0, I_1, I_2) = \int_A \rho(z) (1, z, z^2) dA \quad (26)$$

Then, by inserting Eqs. (19)-(25) into Eq. (17) and setting the coefficients, the following Euler-Lagrange equations were obtained

$$\frac{\partial N}{\partial x} = I_0 \frac{\partial^2 u}{\partial t^2} - I_1 \frac{\partial^3 w}{\partial x \partial t^2} \quad (27)$$

$$\begin{aligned} \frac{\partial^2 M}{\partial x^2} + (N_{\max}^R + N^T) \frac{\partial^2 w}{\partial x^2} &= I_0 \left(\frac{\partial^2 w}{\partial t^2} \right) \\ + I_1 \frac{\partial^3 u}{\partial x \partial t^2} - I_2 \frac{\partial^4 w}{\partial x^2 \partial t^2} & \end{aligned} \quad (28)$$

2.3 The nonlocal FG nanobeam strain gradient model

Nonlocal strain gradient elasticity theory, (Li *et al.* 2015) enumerates the stress for both nonlocal elastic stress and strain gradient stress fields. hence, the stress can be defined as follows

$$\sigma_{ij} = \sigma_{ij}^{(0)} - \frac{d\sigma_{ij}^{(1)}}{dx} \quad (29)$$

where the stresses $\sigma_{xx}^{(0)}$ and $\sigma_{xx}^{(1)}$ are correspond to strain ε_{xx} and strain gradient $\varepsilon_{xx,x}$, respectively and are defined as follow

$$\sigma_{ij}^{(0)} = \int_0^L C_{ijkl} \alpha_0(x, x', e_0 a) \varepsilon'_{kl}(x') dx' \quad (30)$$

$$\sigma_{ij}^{(1)} = l^2 \int_0^L C_{ijkl} \alpha_1(x, x', e_1 a) \varepsilon'_{kl,x}(x') dx' \quad (31)$$

in which C_{ijkl} are the elastic constants and $e_0 a$ and $e_1 a$ enumerate the effect of nonlocal stress field (Narendar and gopalakrishnan 2011) and l is the length scale parameter of material and represents the influence of higher order strain gradient stress field. When the nonlocal functions $\alpha_0(x, x', e_0 a)$ and $\alpha_1(x, x', e_1 a)$ satisfy the developed conditions by Eringen (1983), the constitutive relation for a functionally graded nanobeam can be stated as

$$\begin{aligned} [1 - (e_1 a)^2 \nabla^2] [1 - (e_0 a)^2 \nabla^2] \sigma_{ij} &= \\ C_{ijkl} [1 - (e_1 a)^2 \nabla^2] \varepsilon_{kl} - C_{ijkl} l^2 [1 - (e_0 a)^2 \nabla^2] \nabla^2 \varepsilon_{kl} & \end{aligned} \quad (32)$$

In which ∇^2 denotes the Laplacian operator. Assuming $e_1 = e_0 = e$ and discarding terms of order $O(\nabla^2)$, the general constitutive relation in Eq. (32) can be rewritten as (Li *et al.* 2015)

$$[1 - (ea)^2 \nabla^2] \sigma_{ij} = C_{ijkl} [1 - l^2 \nabla^2] \varepsilon_{kl} \quad (33)$$

Thus, the constitutive relations for a nonlocal Euler-Bernoulli FG nanobeam can be stated as

$$\sigma_{xx} - \mu^2 \frac{\partial^2 \sigma_{xx}}{\partial x^2} = E(z) \left(\varepsilon_{xx} - \lambda^2 \frac{\partial^2 \varepsilon_{xx}}{\partial x^2} \right) \quad (34)$$

where, $\mu = ea$ and $\lambda = l$. By integrating Eq. (34) over the cross-section area of nanobeam provides the following nonlocal relations for FGM beam model as

$$N - \mu^2 \frac{\partial^2 N}{\partial x^2} = (1 - \lambda^2 \frac{\partial^2}{\partial x^2}) (A \frac{\partial u}{\partial x} - B \frac{\partial^2 w}{\partial x^2}) \quad (35)$$

$$M - \mu^2 \frac{\partial^2 M}{\partial x^2} = (1 - \lambda^2 \frac{\partial^2}{\partial x^2}) (B \frac{\partial u}{\partial x} - D \frac{\partial^2 w}{\partial x^2}) \quad (36)$$

where, the cross-sectional rigidities are defined as the following forms

$$(A, B, D) = \int_A E(z) (1, z, z^2) dA \quad (37)$$

The governing equations of Euler-Bernoulli FGM nanobeams in terms of displacements are obtained by inserting for N, M from Eqs. (35)-(36), respectively, into Eqs. (27)-(28) as follows

$$\begin{aligned} & A(1 - \lambda^2 \frac{\partial^2}{\partial x^2}) (\frac{\partial^2 u}{\partial x^2}) - B(1 - \lambda^2 \frac{\partial^2}{\partial x^2}) (\frac{\partial^3 w}{\partial x^3}) \\ & - I_0 \frac{\partial^2 u}{\partial t^2} + I_1 \frac{\partial^3 w}{\partial x \partial t^2} + \mu^2 (I_0 \frac{\partial^4 u}{\partial x^2 \partial t^2} - I_1 \frac{\partial^5 w}{\partial x^3 \partial t^2}) = 0 \end{aligned} \quad (38)$$

$$\begin{aligned} & B(1 - \lambda^2 \frac{\partial^2}{\partial x^2}) (\frac{\partial^3 u}{\partial x^3}) - D(1 - \lambda^2 \frac{\partial^2}{\partial x^2}) (\frac{\partial^4 w}{\partial x^4}) - \\ & (N^T + N_{\max}^R) \frac{\partial^2 (w)}{\partial x^2} - I_0 (\frac{\partial^2 w}{\partial t^2}) - I_1 \frac{\partial^3 u}{\partial x \partial t^2} \\ & + I_2 \frac{\partial^4 w}{\partial x^2 \partial t^2} + \mu^2 [(N^T + N_{\max}^R) \frac{\partial^4 (w)}{\partial x^4} \\ & + I_0 (\frac{\partial^4 w}{\partial x^2 \partial t^2}) + I_1 \frac{\partial^5 u}{\partial x^3 \partial t^2} - I_2 \frac{\partial^6 w}{\partial x^4 \partial t^2}] = 0 \end{aligned} \quad (39)$$

3. Solution procedures

The solution of governing equations of nonlocal FGM nanobeam can be presented by

$$u(x, t) = U_n \exp[i(\beta x - \omega t)] \quad (40)$$

$$w(x, t) = W_n \exp[i(\beta x - \omega t)] \quad (41)$$

where, (U_n, W_n) are the wave amplitudes. By inserting Eqs. (40)-(41) into Eqs. (38)-(39) respectively, we have

$$\left\{ \begin{pmatrix} k_{11} & k_{12} \\ k_{21} & k_{22} \end{pmatrix} - \omega^2 \begin{pmatrix} m_{11} & m_{12} \\ m_{21} & m_{22} \end{pmatrix} \right\} \begin{Bmatrix} U_n \\ W_n \end{Bmatrix} = 0 \quad (42)$$

where

$$\begin{aligned}
k_{1,1} &= -A\beta^2 - \lambda^2 A\beta^4, \quad k_{1,2} = iB\beta^3 + i\lambda^2 B\beta^5 \\
k_{2,1} &= -iB\beta^3 - i\lambda^2 B\beta^5, \quad m_{1,2} = +iI_1\beta(1 + \mu^2\beta^2) \\
k_{2,2} &= (N^T + N_{\max}^R)\beta^2(1 + \mu^2\beta^2) - D\beta^4 - \lambda^2 D\beta^6 \\
m_{1,1} &= -I_0(1 + \mu^2\beta^2), \quad m_{2,1} = -iI_1\alpha(1 + \mu^2\beta^2) \\
m_{2,2} &= -I_0(1 + \mu^2\beta^2) - I_2\beta^2 - \mu^2 I_2\beta^4
\end{aligned} \tag{43}$$

by setting the determinant of above matrix to zero, the circular frequency ω can be obtained. Also, the phase velocity of waves can be calculated by the following relation (Gopalakrishnan and Narendar (2013)).

$$c_p = \frac{\omega}{\beta} \tag{44}$$

which displays the dispersion relation of phase velocity c_p and wave number β for the FGM nanobeam. Also, the escape frequencies of the FG nanobeam can be obtained by setting $\beta \rightarrow \infty$. It is worth mentioning that after the escape frequency, the flexural waves will not change anymore.

4. Numerical results and discussions

This section is devoted to investigate the propagation behavior of temperature-dependent functionally graded nanobeam undergoing rotation in thermal environment. The nanobeam is modeled based on Euler-Bernoulli beam theory. A FG nanobeam shown in Fig. 1 with width $b = 1$ nm and length $L = 10$ nm is considered. The material properties of such FG nanobeam is presented in Table 1. The frequencies are verified with those of Eltaher *et al.* (2012) for various nonlocal parameters and a good agreement is observed as presented in Table 2.

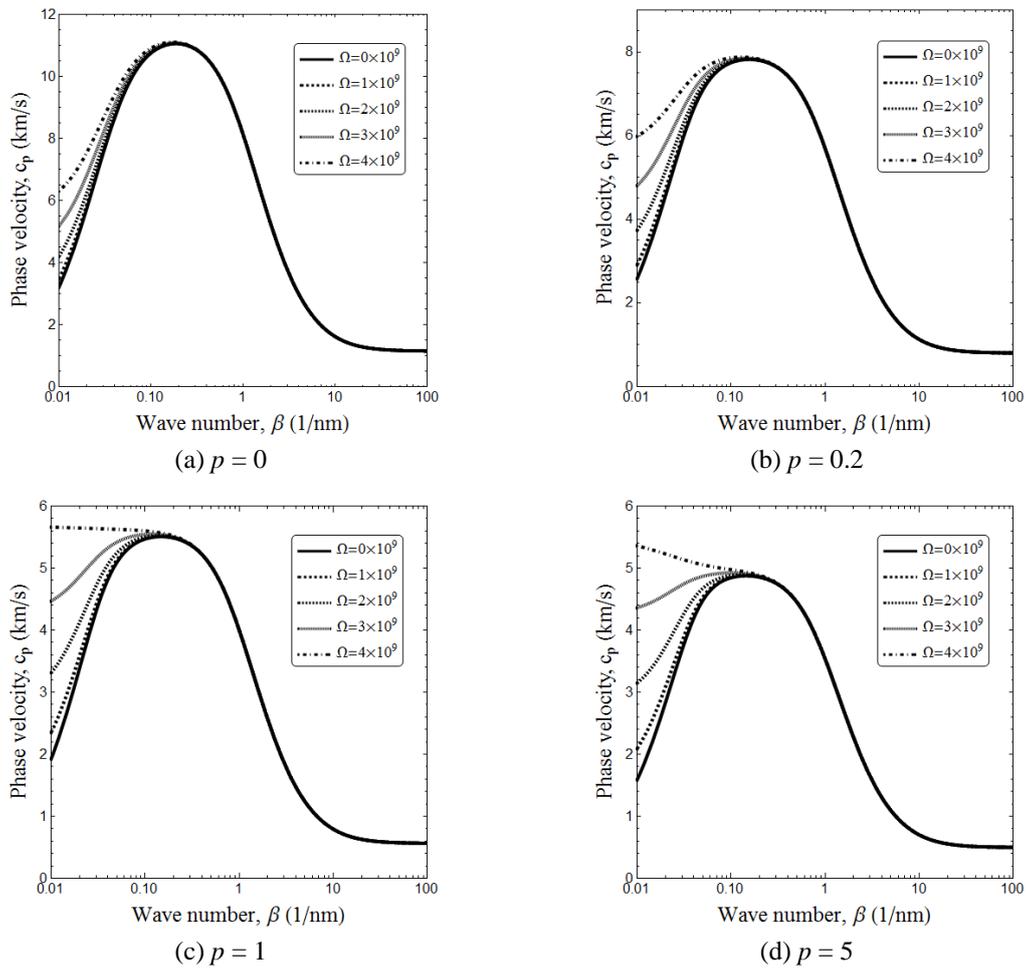
Variation of the phase velocity (c_p) of rotating FG nanobeam versus wave number (β) for various angular velocities (Ω) and gradient indices (p) at a constant value of nonlocality parameter ($\mu = 1$ nm) length scale parameter ($\lambda = 0.1$ nm) and temperature $\Delta T = 200$ is plotted in Fig. 2. It is clear that, with the increase in wave number, the phase velocity increases but for $\beta > 0.1$ the phase

Table 1 Temperature-dependent coefficients for Si₃Ng₄ and SUS304

Material	Properties	P_0	P_{-1}	P_1	P_2	P_3
Si ₃ Ng ₄	E (Pa)	348.43e+9	0	-3.070e-4	2.160e-7	-8.946e-11
	α (K ⁻¹)	5.8723e-6	0	9.095e-4	0	0
	ρ (kg/m ³)	2370	0	0	0	0
	κ (W/mK)	13.723	0	-1.032e-3	5.466e-7	-7.876e-11
	ν	0.24	0	0	0	0
SUS304	E (Pa)	201.04e+9	0	3.079e-4	-6.534e-7	0
	α (K ⁻¹)	12.330e-6	0	8.086e-4	0	0
	ρ (kg/m ³)	8166	0	0	0	0
	κ (W/mK)	15.379	0	-1.264e-3	2.092e-6	-7.223e-10
	ν	0.3262	0	-2.002e-4	3.797e-7	0

Table 2 Comparison of the frequency for power-law FG nanobeams

μ	$p = 0.1$		$p = 0.5$		$p = 1$	
	Eltaher <i>et al.</i> (2012)	Present	Eltaher <i>et al.</i> (2012)	Present	Eltaher <i>et al.</i> (2012)	Present
0	9.2129	9.1887	7.8061	7.7377	7.0904	6.9885
1	8.7879	8.7663	7.4458	7.3820	6.7631	6.6672
2	8.4166	8.3972	7.1312	7.0712	6.4774	6.3865
3	8.0887	8.0712	6.8533	6.7966	6.2251	6.1386

Fig. 2 Variation of phase velocity of rotating FG nanobeam versus wave number for various angular velocities and gradient indices ($\mu = 1$ nm, $\lambda = 0.1$ nm, $\Delta T = 200$)

velocity will decrease and in $\beta \geq 10$ tends to a constant value and don't change anymore. Also, at a constant value of wave number with the increase in angular velocity, phase velocity will increase too. However, at $\beta \leq 0.1$ diagrams of different angular velocities are more distinguished. So, angular velocity of rotating FG nanobeams has no considerable effect on phase velocities at higher

values of wave number.

In addition, phase velocity will decrease with the increase in gradient index. This is due to higher portion of metal phase by increase of gradient index.

In Fig. 3 Variation of phase velocity (c_p) of rotating FG nanobeam for various length scale (λ) and nonlocal parameters (μ) at angular velocity ($\Omega = 1$), temperature change ($\Delta T = 200$) and gradient index ($p = 1$) in plotted. It is observable that for $\lambda = 0$ and $\mu \geq 1$ with the increase in wave number, the phase velocity tends to zero but for $\mu < 1$ the phase velocity does not vary with the change in wave number after $\beta > 0.1$. However, when $\lambda \neq 0$ and $\beta \geq 10$ the phase velocity is not affected by wave number. Also, at a constant value of wave number with the increase in length scale parameter, the phase velocity will increase. This is due to stiffness enhancement of nanobeam by considering strain gradient effects. Also, with the increase in nonlocality parameter, phase velocity will decrease for every value of length scale parameter. Also, it is found that diagrams of different length scale parameters are distinguished when $\beta \geq 0.1$. So, phase velocity of

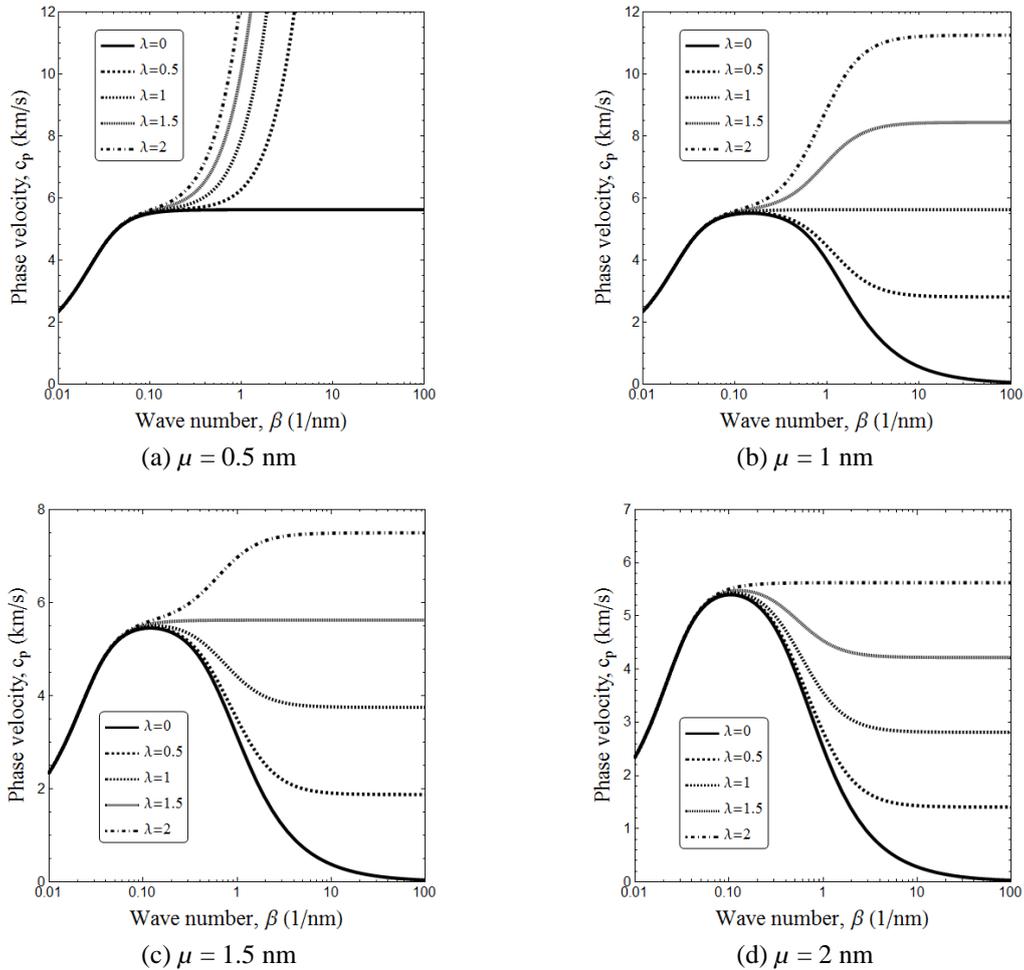


Fig. 3 Variation of phase velocity of rotating FG nanobeam for various length scale and nonlocal parameters ($\Omega = 1$, $\Delta T = 200$, $p = 1$)

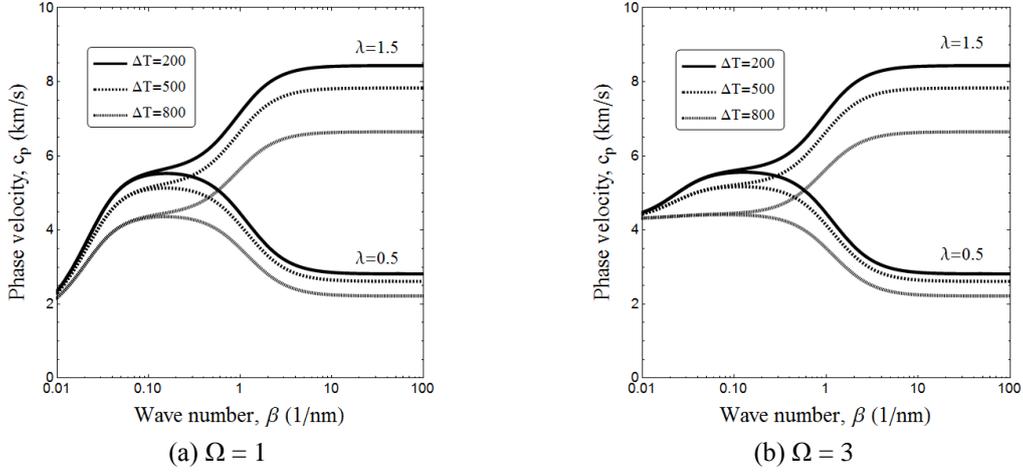


Fig. 4 Variation of phase velocity of rotating FG nanobeam versus wave number for various length scale parameters and temperature changes ($\mu = 1$ nm, $p = 1$)

rotating FG nanobeams is not affected by length scale parameter at lower values of wave number.

Fig. 4 shows the variation of phase velocity (c_p) of rotating FG nanobeam versus wave number (β) for various length scale parameters (λ) and temperature changes (ΔT) at constant values of nonlocality parameter ($\mu = 1$ nm) and gradient index ($p = 1$). It is observable that, in $\beta \leq 0.1$ with the increase in wave number, phase velocity increases, but for $\beta \geq 0.1$ diagram of various length scale parameters are distinguished. Also, phase velocity does not change with the increase in wave number in $\beta \geq 10$ for every value of temperature change. In addition, at a constant value of wave number increasing in temperature leads to lower phase velocities, especially at higher wave numbers.

Variation of phase velocity (c_p) of rotating FG nanobeam versus angular velocity (Ω) for various temperature changes (ΔT) and wave numbers at $\mu = 1$ nm, $\lambda = 0.5$ nm and $p = 1$ is plotted in Fig. 5. It can be seen that, with the increase in angular velocity, phase velocity increases for every value of temperature change. But, this increment in phase velocity is significantly influenced by the value of wave number. In fact, increase of phase velocity with the rise of angular velocity is more prominent at lower wave numbers. Also, at a constant value of angular velocity, increasing in temperature causes the decrease in phase velocities, since stiffness of nanobeams degrades with increase of temperature.

In Fig. 6 variation of escape frequency (ω_{es}) of rotating FG nanobeam versus length scale parameter (λ) for various gradient indices (P) is plotted at constant values of nonlocality parameter ($\mu = 1$ nm) and temperature ($\Delta T = 200$). It is clear from the figure that, increase in length scale parameter, causes the increase in escape frequency. Also, it is observable that, with the increase in gradient index, the slope of diagram of various gradient indices decreases.

Fig. 7 shows the variation of escape frequency (ω_{es}) of rotating FG nanobeam versus angular velocity (Ω) for various temperature changes (ΔT) with the constant values of nonlocality parameter ($\mu = 1$ nm), length scale parameter ($\lambda = 0.5$ nm) and gradient index ($p = 1$). It is observable that, with the increase in angular velocity, escape frequency remains constant. Because, escape frequencies are obtained by setting wave number to infinity. Although, increase in temperature causes decrease of escape frequency, regardless of the value of angular velocity.

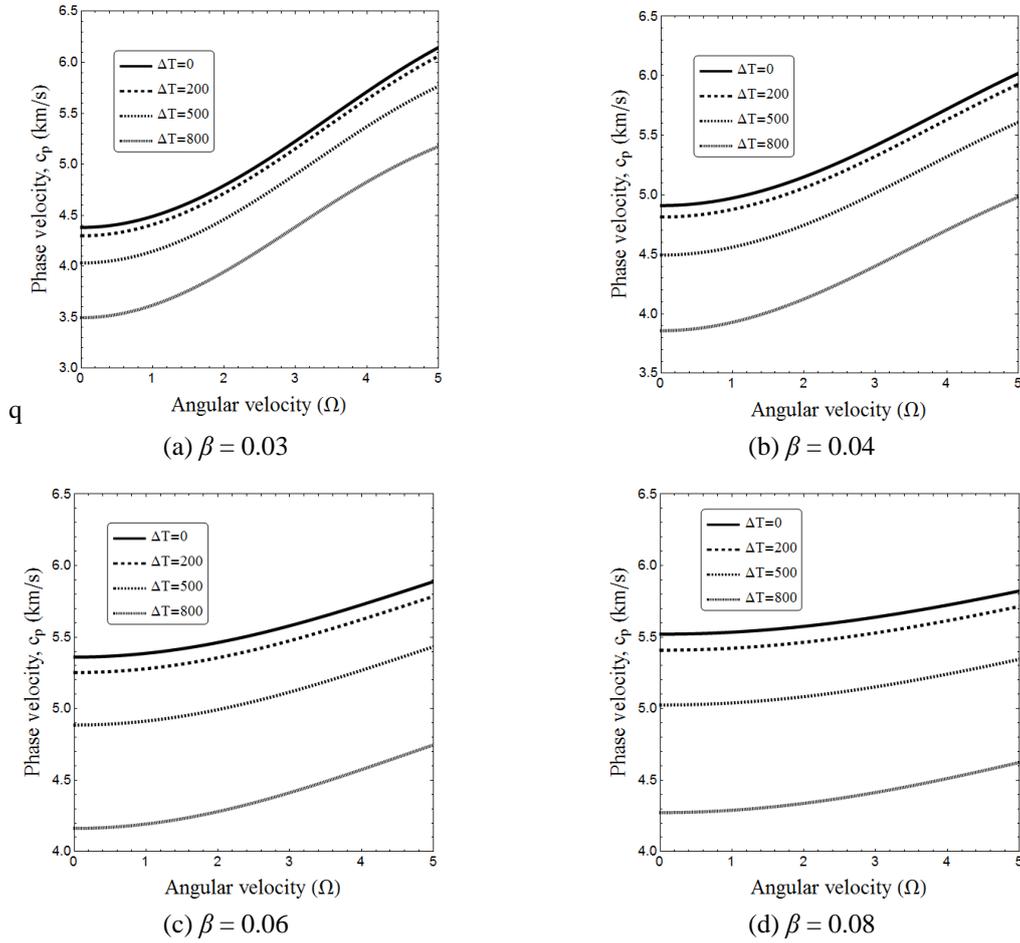


Fig. 5 Variation of phase velocity of rotating FG nanobeam versus angular velocity for various temperature changes ($\mu = 1$ nm, $\lambda = 0.5$ nm, $p = 1$)

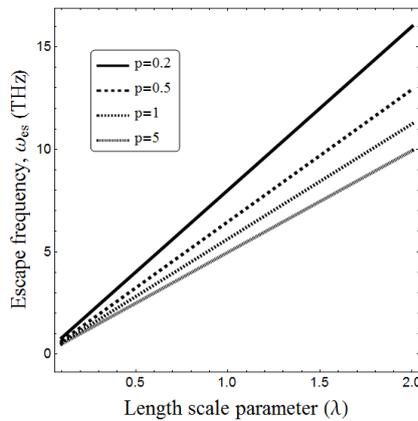


Fig. 6 Variation of escape frequency of rotating FG nanobeam versus length scale parameter for various gradient indices ($\mu = 1$ nm, $\Delta T = 200$)

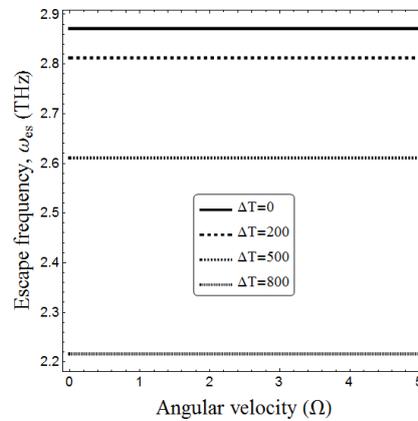


Fig. 7 Variation of escape frequency of rotating FG nanobeam versus angular velocity for various temperature changes ($\mu = 1$ nm, $\lambda = 0.5$ nm, $p = 1$)

5. Conclusions

In this paper, wave dispersion characteristics of a rotating functionally graded (FG) nanobeam is explored based on Euler-Bernoulli beam theory. Material properties of rotating nanobeam are supposed to be graded according to Mori-Tanaka distribution function. Finally, through some parametric study, the effect of different parameters such as angular velocity, gradient index, nonlocality parameter, temperature rise and wave number on wave dispersion behavior of rotating FG nanobeam are studied. It is found that increasing in the angular velocity causes the increase in phase velocity. However, effect of angular velocity on wave frequency and phase velocity is significant at lower wave numbers. Also, the increasing in nonlocality parameter causes decrease in wave frequency and phase velocity at a constant angular velocity. Length scale parameter introduces a stiffness-hardening effect on the nanobeam structure and increases the phase velocities and escape frequencies. However, the escape frequency is not influenced by the change in angular velocity. Also, phase velocities and escape frequencies of rotating FG nanobeam will decrease with increase of temperature, especially at higher wave numbers.

References

- Ahouel, M., Houari, M.S.A., Bedia, E.A. and Tounsi, A. (2016), "Size-dependent mechanical behavior of functionally graded trigonometric shear deformable nanobeams including neutral surface position concept", *Steel Compos. Struct., Int. J.*, **20**(5), 963-981.
- Aranda-Ruiz, J., Loya, J. and Fernández-Sáez, J. (2012), "Bending vibrations of rotating nonuniform nanocantilevers using the Eringen nonlocal elasticity theory", *Compos. Struct.*, **94**(9), 2990-3001.
- Aydogdu, M. (2014), "Longitudinal wave propagation in multiwalled carbon nanotubes", *Compos. Struct.*, **107**, 578-584.
- Ebrahimi, F. (2013), "Analytical investigation on vibrations and dynamic response of functionally graded plate integrated with piezoelectric layers in thermal environment", *Mech. Adv. Mater. Struct.*, **20**(10), 854-870.
- Ebrahimi, F. and Barati, M.R. (2016a), "A nonlocal higher-order refined magneto-electro-viscoelastic beam model for dynamic analysis of smart nanostructures", *Int. J. Eng. Sci.*, **107**, 183-196.

- Ebrahimi, F. and Barati, M.R. (2016b), "A nonlocal higher-order shear deformation beam theory for vibration analysis of size-dependent functionally graded nanobeams", *Arab. J. Sci. Eng.*, **41**(5), 1679-1690.
- Ebrahimi, F. and Barati, M.R. (2017c), "A nonlocal strain gradient refined beam model for buckling analysis of size-dependent shear-deformable curved FG nanobeams", *Compos. Struct.*, **159**, 174-182.
- Ebrahimi, F. and Barati, M.R. (2016d), "A unified formulation for dynamic analysis of nonlocal heterogeneous nanobeams in hygro-thermal environment", *Appl. Phys. A*, **122**(9), 792.
- Ebrahimi, F. and Barati, M.R. (2016e), "An exact solution for buckling analysis of embedded piezoelectromagnetically actuated nanoscale beams", *Adv. Nano Res., Int. J.*, **4**(2), 65-84.
- Ebrahimi, F. and Barati, M.R. (2016f), "Buckling analysis of nonlocal third-order shear deformable functionally graded piezoelectric nanobeams embedded in elastic medium", *J. Brazil. Soc. Mech. Sci. Eng.*, **39**(3), 937-952.
- Ebrahimi, F. and Barati, M.R. (2016g), "Buckling analysis of piezoelectrically actuated smart nanoscale plates subjected to magnetic field", *J. Intel. Mater. Syst. Struct.*, **28**(11), 1472-1490.
- Ebrahimi, F. and Barati, M.R. (2016h), "Buckling analysis of smart size-dependent higher order magneto-electro-thermo-elastic functionally graded nanosize beams", *J. Mech.*, **33**(1), 23-33.
- Ebrahimi, F. and Barati, M.R. (2016i), "Dynamic modeling of a thermo-piezo-electrically actuated nanosize beam subjected to a magnetic field", *Appl. Phys. A*, **122**(4), 1-18.
- Ebrahimi, F. and Barati, M.R. (2016j), "Electromechanical buckling behavior of smart piezoelectrically actuated higher-order size-dependent graded nanoscale beams in thermal environment", *Int. J. Smart Nano Mater.*, **7**(2), 69-90.
- Ebrahimi, F. and Barati, M.R. (2016k), "Flexural wave propagation analysis of embedded S-FGM nanobeams under longitudinal magnetic field based on nonlocal strain gradient theory", *Arab. J. Sci. Eng.*, **42**(5), 1715-1726.
- Ebrahimi, F. and Barati, M.R. (2017l), "Hygrothermal effects on vibration characteristics of viscoelastic FG nanobeams based on nonlocal strain gradient theory", *Compos. Struct.*, **159**, 433-444.
- Ebrahimi, F. and Barati, M.R. (2016m), "Magnetic field effects on buckling behavior of smart size-dependent graded nanoscale beams", *Eur. Phys. J. Plus*, **131**(7), 1-14.
- Ebrahimi, F. and Barati, M.R. (2016n), "Magnetic field effects on dynamic behavior of inhomogeneous thermo-piezo-electrically actuated nanoplates", *J. Brazil. Soc. Mech. Sci. Eng.*, **39**(6), 2203-2223.
- Ebrahimi, F. and Barati, M.R. (2016o), "Magneto-electro-elastic buckling analysis of nonlocal curved nanobeams", *Eur. Phys. J. Plus*, **131**(9), 346.
- Ebrahimi, F. and Barati, M.R. (2016p), "On nonlocal characteristics of curved inhomogeneous Euler-Bernoulli nanobeams under different temperature distributions", *Appl. Phys. A*, **122**(10), 880.
- Ebrahimi, F. and Barati, M.R. (2016q), "Size-dependent thermal stability analysis of graded piezomagnetic nanoplates on elastic medium subjected to various thermal environments", *Appl. Phys. A*, **122**(10), 910.
- Ebrahimi, F. and Barati, M.R. (2016r), "Small-scale effects on hygro-thermo-mechanical vibration of temperature-dependent nonhomogeneous nanoscale beams", *Mech. Adv. Mater. Struct.*, **24**(11), 924-936.
- Ebrahimi, F. and Barati, M.R. (2016s), "Static stability analysis of smart magneto-electro-elastic heterogeneous nanoplates embedded in an elastic medium based on a four-variable refined plate theory", *Smart Mater. Struct.*, **25**(10), 105014.
- Ebrahimi, F. and Barati, M.R. (2016t), "Vibration analysis of nonlocal beams made of functionally graded material in thermal environment", *Eur. Phys. J. Plus*, **131**(8), 279.
- Ebrahimi, F. and Barati, M.R. (2016u), "Vibration analysis of smart piezoelectrically actuated nanobeams subjected to magneto-electrical field in thermal environment", *J. Vib. Control*, 1077546316646239.
- Ebrahimi, F. and Barati, M.R. (2016v), "Wave propagation analysis of quasi-3D FG nanobeams in thermal environment based on nonlocal strain gradient theory", *Appl. Phys. A*, **122**(9), 843.
- Ebrahimi, F. and Barati, M.R. (2016w), "Temperature distribution effects on buckling behavior of smart heterogeneous nanosize plates based on nonlocal four-variable refined plate theory", *Int. J. Smart Nano Mater.*, **7**(3), 119-143.
- Ebrahimi, F. and Hosseini, S.H.S. (2016a), "Double nanoplate-based NEMS under hydrostatic and

- electrostatic actuations”, *Eur. Phys. J. Plus*, **131**(5), 1-19.
- Ebrahimi, F. and Hosseini, S.H.S. (2016b), “Nonlinear electroelastic vibration analysis of NEMS consisting of double-viscoelastic nanoplates”, *Appl. Phys. A*, **122**(10), 922.
- Ebrahimi, F. and Hosseini, S.H.S. (2016c), “Thermal effects on nonlinear vibration behavior of viscoelastic nanosize plates”, *J. Therm. Stress.*, **39**(5), 606-625.
- Ebrahimi, F. and Nasirzadeh, P. (2015), “A nonlocal Timoshenko beam theory for vibration analysis of thick nanobeams using differential transform method”, *J. Theor. Appl. Mech.*, **53**(4), 1041-1052.
- Ebrahimi, F. and Mokhtari, M. (2015), “Transverse vibration analysis of rotating porous beam with functionally graded microstructure using the differential transform method”, *J. Brazil. Soc. Mech. Sci. Eng.*, **37**(4), 1435-1444.
- Ebrahimi, F. and Salari, E. (2015a), “A semi-analytical method for vibrational and buckling analysis of functionally graded nanobeams considering the physical neutral axis position”, *CMES: Comput. Model. Eng. Sci.*, **105**(2), 151-181.
- Ebrahimi, F. and Salari, E. (2015b), “Effect of various thermal loadings on buckling and vibrational characteristics of nonlocal temperature-dependent FG nanobeams”, *Mech. Adv. Mater. Struct.*, **23**(12), 1379-1397.
- Ebrahimi, F. and Salari, E. (2015c), “Nonlocal thermo-mechanical vibration analysis of functionally graded nanobeams in thermal environment”, *Acta Astronautica*, **113**, 29-50.
- Ebrahimi, F. and Salari, E. (2015d), “Size-dependent free flexural vibrational behavior of functionally graded nanobeams using semi-analytical differential transform method”, *Compos. B*, **79**, 156-169.
- Ebrahimi, F. and Salari, E. (2015e), “Size-dependent thermo-electrical buckling analysis of functionally graded piezoelectric nanobeams”, *Smart Mater. Struct.*, **24**(12), 125007.
- Ebrahimi, F. and Salari, E. (2015f), “Thermal buckling and free vibration analysis of size dependent Timoshenko FG nanobeams in thermal environments”, *Compos. Struct.*, **128**, 363-380.
- Ebrahimi, F. and Salari, E. (2015g), “Thermo-mechanical vibration analysis of nonlocal temperature-dependent FG nanobeams with various boundary conditions”, *Compos. Part B: Eng.*, **78**, 272-290.
- Ebrahimi, F. and Shafiei, N. (2016), “Application of Eringen’s nonlocal elasticity theory for vibration analysis of rotating functionally graded nanobeams”, *Smart Struct. Syst., Int. J.*, **17**(5), 837-857.
- Ebrahimi, F. and Zia, M. (2015), “Large amplitude nonlinear vibration analysis of functionally graded Timoshenko beams with porosities”, *Acta Astronautica*, **116**, 117-125.
- Ebrahimi, F., Ghadiri, M., Salari, E., Hoseini, S.A.H. and Shaghaghi, G.R. (2015a), “Application of the differential transformation method for nonlocal vibration analysis of functionally graded nanobeams”, *J. Mech. Sci. Tech.*, **29**(3), 1207-1215.
- Ebrahimi, F., Salari, E. and Hosseini, S.A.H. (2015b), “Thermomechanical vibration behavior of FG nanobeams subjected to linear and non-linear temperature distributions”, *J. Therm. Stress.*, **38**(12), 1360-1386.
- Ebrahimi, F., Salari, E. and Hosseini, S.A.H. (2016a), “In-plane thermal loading effects on vibrational characteristics of functionally graded nanobeams”, *Meccanica*, **51**(4), 951-977.
- Ebrahimi, F., Ghasemi, F. and Salari, E. (2016b), “Investigating thermal effects on vibration behavior of temperature-dependent compositionally graded Euler beams with porosities”, *Meccanica*, **51**(1), 223-249.
- Ebrahimi, F., Barati, M.R. and Haghi, P. (2017), “Thermal effects on wave propagation characteristics of rotating strain gradient temperature-dependent functionally graded nanoscale beams”, *J. Therm. Stress.*, **40**(5), 535-547.
- Eltaher, M.A., Emam, S.A. and Mahmoud, F.F. (2012), “Free vibration analysis of functionally graded size-dependent nanobeams”, *Appl. Math. Computat.*, **218**(14), 7406-7420.
- Eltaher, M.A., Khater, M.E. and Emam, S.A. (2016), “A review on nonlocal elastic models for bending, buckling, vibrations, and wave propagation of nanoscale beams”, *Appl. Math. Model.*, **40**(5), 4109-4128.
- Eringen, A.C. (1972), “Linear theory of nonlocal elasticity and dispersion of plane waves”, *Int. J. Eng. Sci.*, **10**(5), 425-435.
- Eringen, A.C. (1983), “On differential equations of nonlocal elasticity and solutions of screw dislocation and surface waves”, *J. Appl. Phys.*, **54**(9), 4703-4710.

- Filiz, S. and Aydogdu, M. (2015), "Wave propagation analysis of embedded (coupled) functionally graded nanotubes conveying fluid", *Compos. Struct.*, **132**, 1260-1273.
- Gopalakrishnan, S. and Narendar, S. (2013), *Wave Propagation in Nanostructures*, Springer, Switzerland.
- Li, L., Hu, Y. and Ling, L. (2015), "Flexural wave propagation in small-scaled functionally graded beams via a nonlocal strain gradient theory", *Compos. Struct.*, **133**, 1079-1092.
- Li, L., Li, X. and Hu, Y. (2016), "Free vibration analysis of nonlocal strain gradient beams made of functionally graded material", *Int. J. Eng. Sci.*, **102**, 77-92.
- Lim, C.W. and Yang, Y. (2010), "Wave propagation in carbon nanotubes: nonlocal elasticity-induced stiffness and velocity enhancement effects", *J. Mech. Mater. Struct.*, **5**(3), 459-476.
- Narendar, S. (2016), "Wave dispersion in functionally graded magneto-electro-elastic nonlocal rod", *Aerosp. Sci. Technol.*, **51**, 42-51.
- Narendar, S. and Gopalakrishnan, S. (2009), "Nonlocal scale effects on wave propagation in multi-walled carbon nanotubes", *Computat. Mater. Sci.*, **47**(2), 526-538.
- Narendar, S. and Gopalakrishnan, S. (2011a), "Axial wave propagation in coupled nanorod system with nonlocal small scale effects", *Compos. Part B: Eng.*, **42**(7), 2013-2023.
- Narendar, S. and Gopalakrishnan, S. (2011b), "Nonlocal wave propagation in rotating nanotube", *Results in Physics*, **1**(1), 17-25.
- Narendar, S., Gupta, S.S. and Gopalakrishnan, S. (2012), "Wave propagation in single-walled carbon nanotube under longitudinal magnetic field using nonlocal Euler-Bernoulli beam theory", *Appl. Math. Model.*, **36**(9), 4529-4538.
- Şimşek, M. (2016), "Nonlinear free vibration of a functionally graded nanobeam using nonlocal strain gradient theory and a novel Hamiltonian approach", *Int. J. Eng. Sci.*, **105**, 12-27.
- Srivastava, D. (1997), "A phenomenological model of the rotation dynamics of carbon nanotube gears with laser electric fields", *Nanotechnology*, **8**(4), 186.
- Wang, L. (2010), "Wave propagation of fluid-conveying single-walled carbon nanotubes via gradient elasticity theory", *Computat. Mater. Sci.*, **49**(4), 761-766.
- Yang, F.A.C.M., Chong, A.C.M., Lam, D.C. and Tong, P. (2002), "Couple stress based strain gradient theory for elasticity", *Int. J. Solids Struct.*, **39**(10), 2731-2743.
- Yang, Y., Zhang, L. and Lim, C.W. (2011), "Wave propagation in double-walled carbon nanotubes on a novel analytically nonlocal Timoshenko-beam model", *J. Sound Vib.*, **330**(8), 1704-1717.
- Zhang, S., Liu, W.K. and Ruoff, R.S. (2004), "Atomistic simulations of double-walled carbon nanotubes (DWCNTs) as rotational bearings", *Nano Letters*, **4**(2), 293-297.